

HS2000 Bi-Directional & HS1000

Ruggedly constructed RGC Swing Hoists are ideal for handling heavy, bulky loads. Offered as HS1000 (1/2 ton) and HS2000 Bi-Directional (1 ton) models, these hoists are easily transported and assembled. Self-locking pins and basic hand tools are used to quickly build a strong, safe, reliable hoist.

RGC Swing Hoists are powered by either a gas or electric HydraPak. The power up and power down feature puts the operator in complete control. A separate winch and power unit make the hoists extremely easy to handle.

An optional handwinch is also available to raise the HydraPak to the roof with minimal effort. It quickly mounts to the hoist frame and can lift a HydraPak up over 10 stories.

Swing Hoist Features & Benefits

- ▶ The HS2000 Bi-Directional hoist can be set up to swing to the left or to the right.
- ▶ High-strength steel tubing is used to build these strong reliable hoists.
- ▶ An exceptional boom design ensures greater strength.
- ▶ The cable keeper provides added lifting stability.
- ▶ The hydraulic power up and power down feature puts the operator in complete control.
- ▶ Separate winch and power units make the hoist extremely easy to handle.
- ▶ A split leg frame design makes transporting the hoist easy.
- ▶ Self-locking pins permit quick and easy frame assembly.
- ▶ The winch is also mounted to the hoist frame with pins.
- ▶ The swing boom unloads materials well back of the roof edge for greater operator safety.
- ▶ Nesting ballast weight shells are included for additional safety.
- ▶ The self-locking hydraulic boom makes loading and unloading materials safe and fast.
- ▶ An optional handwinch quickly mounts to the hoist frame to raise the HydraPak up 10+ stories.
- ▶ An optional HydraWinch HD is available with 730 ft. of wire rope for the HS2000.
- ▶ An optional Upper Limit Switch for anti-two blocking is also available for the HS2000.

**HS2000 Swing Hoist with
1600 lb. Gravel Bucket**



**HS1000 Swing Hoist
with 400 lb. Trash Tray**




Specifications

Hoist Model Specs	HS1000	HS2000	HS300
Capacity	1000 lbs.	2000 lbs.	300 lbs.
Standard Winch	HW1000S	HW2000S	---
Cable: Supplied	150 / 300 ft.	200 / 300 ft.	---
Hoist Speed (standard winch)	140 fpm	160 / 80 fpm	---
Optional Winch	Call Factory	HydraWinch HD	---
Cable: Supplied	---	730 ft.	---
Hoist Speed (HD winch)	---	200 / 100 fpm	---
Counterweight	1000 lbs.	2000 lbs.	600 lbs.
Ballast Included	20 pcs.	40 pcs.	12 pcs.
Frame Weight	587 lbs.	691 lbs.	158 lbs.
Overall Height (to top of boom)	122 in.	153 in.	92 in.
Boom Overhang	55 in.	60 in.	48 in.

SH300 Swing Hoist Features & Benefits

- ▶ The tripod design provides rooftop stability.
- ▶ Lightweight components are easily transported and assembled.
- ▶ The boom locks for greater hoisting and unloading safety.
- ▶ Nesting ballast weights, in a convenient form, are included for additional safety.
- ▶ An optional fence is available to provide extra operator protection.
- ▶ This hoist is ideal for raising Swing Hoist and Trolley Hoist frames to the roof top.
- ▶ The SH300 is a 300 lb. capacity manually operated swing boom hoist.
- ▶ The SH300 with winch is a complete hoist with built-in handwinch for added convenience.

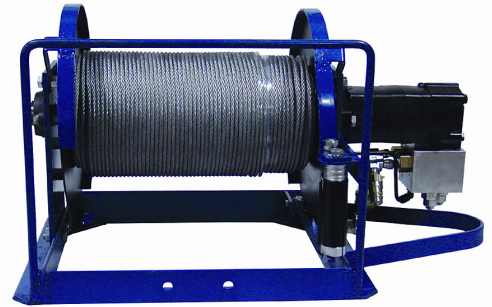

HydraWinch HD



HV1658S HydraPak

Swing Hoist HydraPaks


RGC HydraPaks are versatile single power sources that put reliable, efficient hydraulic power at the job site. These light weight portable power units are so adaptable that they can operate a Swing Hoist or a HydraSaw.

Available in 10, 11, 13, 16 and 18 HP gas models and a 7.5 HP electric model, all are equipped with a 6 gallon hydraulic oil reservoir, heavy-duty heat exchanger and lifting eye.

HydraPaks are cart-mounted and have pneumatic tires for easy transporting.

Shown above is an HV1658S HydraPak. It is equipped with a 16 HP B & S Vanguard engine with both electric and pull start, 5 or 8 gpm output, and winch and boom valves.

Most HydraPaks are available with an optional safety valve for the Swing Hoist Limit Switch.

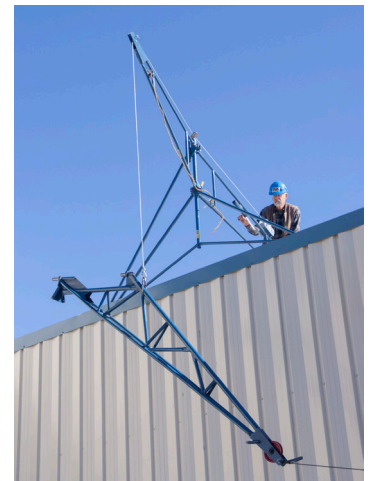

**SH300 Hand Swing Hoist
w/ Hand Winch**

Specifications

Winch Model	HW 1000S	HW2000S	HydraWinch HD
Capacity	1000 lbs.	1000/2000 lbs.	1000/2000 lbs.
Max. Lifting Speed	Up to 165 fpm	Up to 165 fpm (1 part line) Up to 82 fpm (2 parts line)	Up to 200 fpm (1 part line) Up to 100 fpm (2 parts line)
Cable Supplied	150 ft.	200 ft.	730 ft.
Cable Max.	300 ft.	300 ft.	730 ft.
Max. Lifting Height	285' @ 500 lbs.	285' @ 660 lbs.	700' @ 1000 lbs.
Weight (approx)	118 lbs.	124 lbs.	216 lbs.