

faster, safer, smarter,

# I-BEAM: FIXED&TROLLEY

Capacity: 2000lbs

# **KEY FEATURES**

#### **FIXED I-BEAM**

- Fixed I-Beam option firmly holds the hoist stationary. Perfect for moving materials in confined spaces like the interior of scaffolding or an elevator shaft
- Fixed I-Beam top is compatible with I-Beams with a flange width of 2.66"-4.9"

#### **I-BEAM TROLLEY**

- Material delivery made easy with I-Beam Trolley that moves along the full length of the beam
- Customize forward and backward cantilever to your unique job site requirements
- Adjustable Flange Widths of 2.66"-8.7" allows Trolley to attach to standard I-Beams allowing for easy installation on any jobsite
- Perfect for heavy duty projects
- Suspension Brackets allow you to install your own I-Beam to existing scaffolding anywhere on the jobsite
- Counterweight Clamp Assembly helps balance overall weight distribution, installs easily and accommodates your weights
- All Beta Max mounting systems can be tailored to your jobsite specifications

## **COMPONENT LIST**

- Suspension Brackets: 60-40 (fits up to 6.25 in flange width)
- Fixed Top: **60-8**Trolley Top: **60-25**
- Counter Weight Clamp Assy. 60-1
- Scorpio Trolley: **20-44-1** (fits up to 6.5 in flange width)



Fixed I-Beam: 60-8



I-Beam Trolley: 20-44-1 | 60-25

### **COMPATIBLE HOISTS**


- Scorpio Plus XL
- Gemini Plus
- New Yorker
  - Leo & Leo XXL




Contact Beta Max today for local dealer information, to discuss your project, or get a quote. www.BetamaxHoist.com (800) 644-6478




# I-BEAM: FIXED&TROLLEY

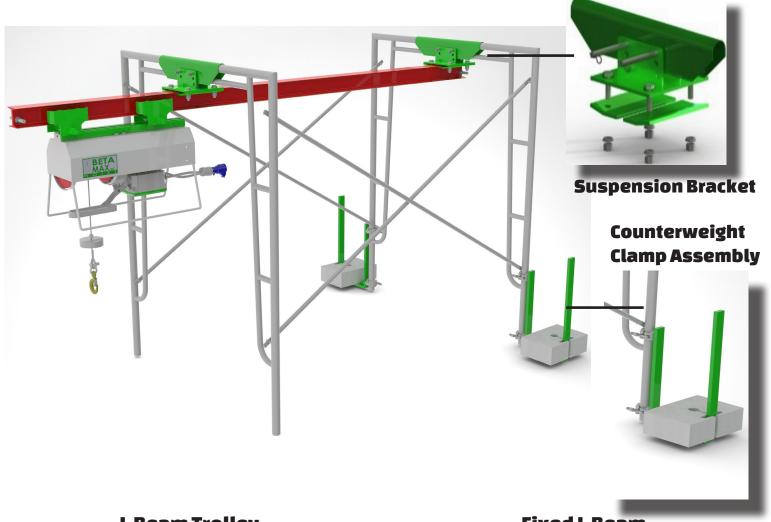

**I-Beam Trolley** 

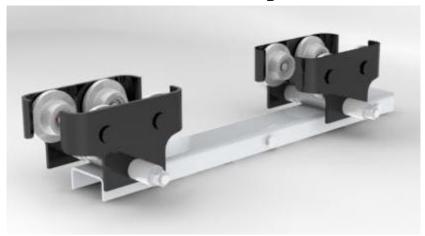

**Fixed I-Beam** 



Contact Beta Max today for local dealer information, to discuss your project, or get a quote. www.BetamaxHoist.com (800) 644-6478