


A192806

16'

## **TECHNICAL**SPECIFICATIONS

## **Cross Arm Strap**

3" wide (variable lengths available) with large D-ring and small D-ring. Meets or Exceeds ANSI Z359.1-2007 and OSHA.

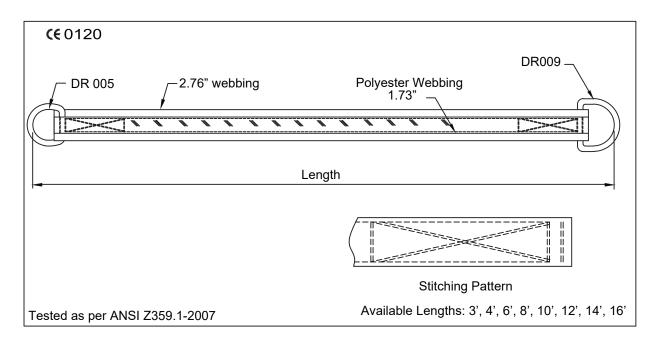

DESIGN:	1-3/4" wide polyester webbing stitched with 3" webbing on the back for extra
	protection.

WEBBING:	Material: Polyester Width: 1.73 in. ± 0.04 in. and 2.76 in. ± 0.04 in. Breaking Strength: 5000 lbs.		
STITCHINGTHREAD:	Material: High-tenacity polyester		
	Material: Alloy Steel, Yellow Chromate Finish: Golden Yellow Galvanized	Part #	Length
METALCOMPONENT:		A36806	3'
	Breaking Strength: 5000 lbs.	A48806	4'
VITAL TEST	Static Strength: Static Strength: 5000 lbs.	A72806	6'
COMPLIANCE:	Dynamic Strength: Free fall from 4.92 ft. height with test mass of 220.46 lbs.	A96806	8'
		A120806	10'
WEIGHT	3.28 ft.: 0.99 lbs. ± 0.02 lbs. 4.92 ft.: 1.10 lbs. ± 0.02 lbs.	A144806	12'
WEIGHT.	6.56 ft.: 1.21 lbs. ± 0.02 lbs.	A168806	14'