


PN: SRL121132T

TECHNICAL SPECIFICATIONS

Dual SRL 6' Light Weight Web with Small Hook with Connector (SRL170 or SRL 169)

Two 6' retractable web, light weight plastic housing, external shock-pack, $\frac{3}{4}$ " hook, $\frac{1}{2}$ " carabiner included. Min breaking strength 3000 lbs. Meets ANSI Z359.14-2014 Class A.

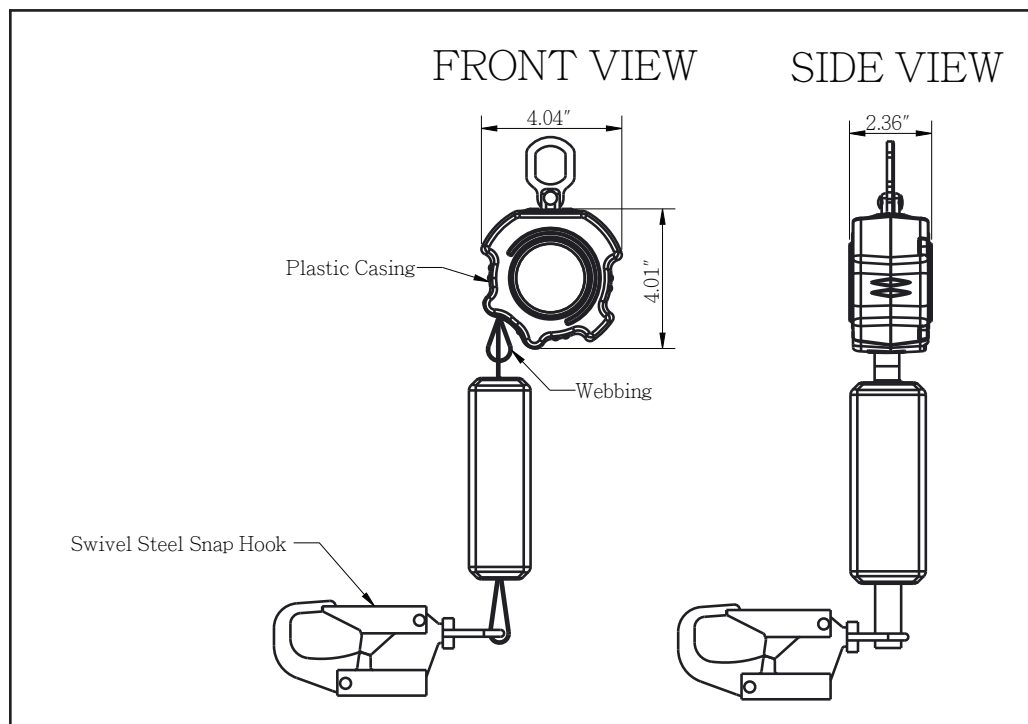

PHYSICAL PARAMETERS:

- Lightest available SRL in its range/class.
- Robust & durable plastic casting.
- Technora Webbing with Energy absorber.
- Aluminum quarter turn locking hook at attachment end (PN 160A as per ANSI Z359.12-2009 gate strength 3600 lbs.)

USER CAPACITY: 420 lbs.

LENGTH: 6 ft. (Maximum)

WEBBING: Material: Technora webbing 13/16"
Minimum Breaking Strength: 4500 lbs.

VITAL TEST COMPLIANCE:

Static Strength: 3000 lbs. for 1 minute.
Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.
Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" webbing. Breaking force less than 1800 lbs. and arrest distance less than 24".

WEIGHT: 1.84 lbs. $\pm$ 0.02 lbs. (per SRL)